




Installing a BRITA filter to a Combi Steamer

When installing a BRITA filter to a Combi oven it is vital that the correct connection is made with the hoses to the correct water inlets, in order that the only water that is filtered is that which is going to be heated in the boiler or steam generator, and not for the water that is going to be used for cleaning or quench. If this is not set up properly, it can lead to excessive filtered water usage and additional unnecessary cost.

The hose from the BRITA filter must only be connected to the softened water intake, or steam intake (see photo below). A second supply direct from the main supply goes direct into clean/flush/quench intake.

Note labels on back of combi identifying softened water intake and clean/flush/quench water intake

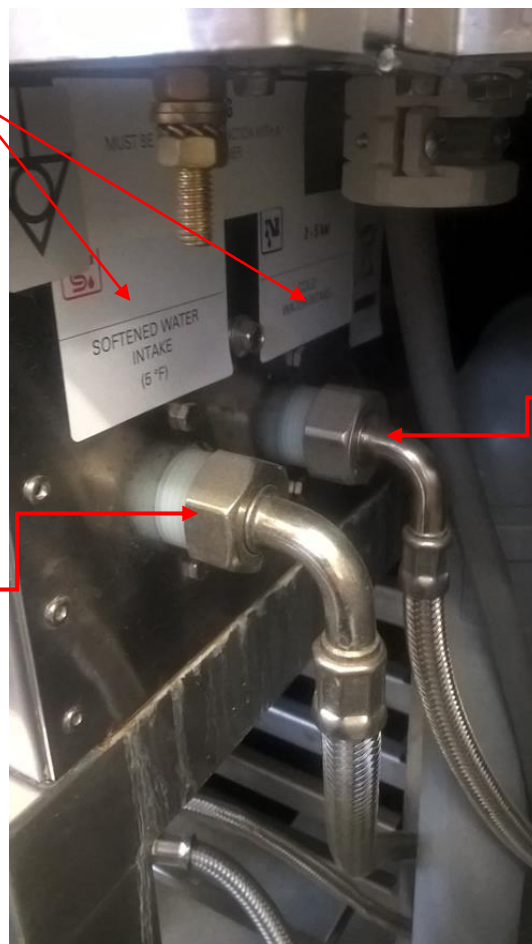


Hose from BRITA filter outlet (filtered water)

Hose from separate mains stopcock (un-filtered water)



In some cases the combi steamer is fitted with a white plastic combination inlet (see photo below). Do not connect the BRITA filter to this. Remove it and use the two separate inlets for steam and cleaning as described above instead.

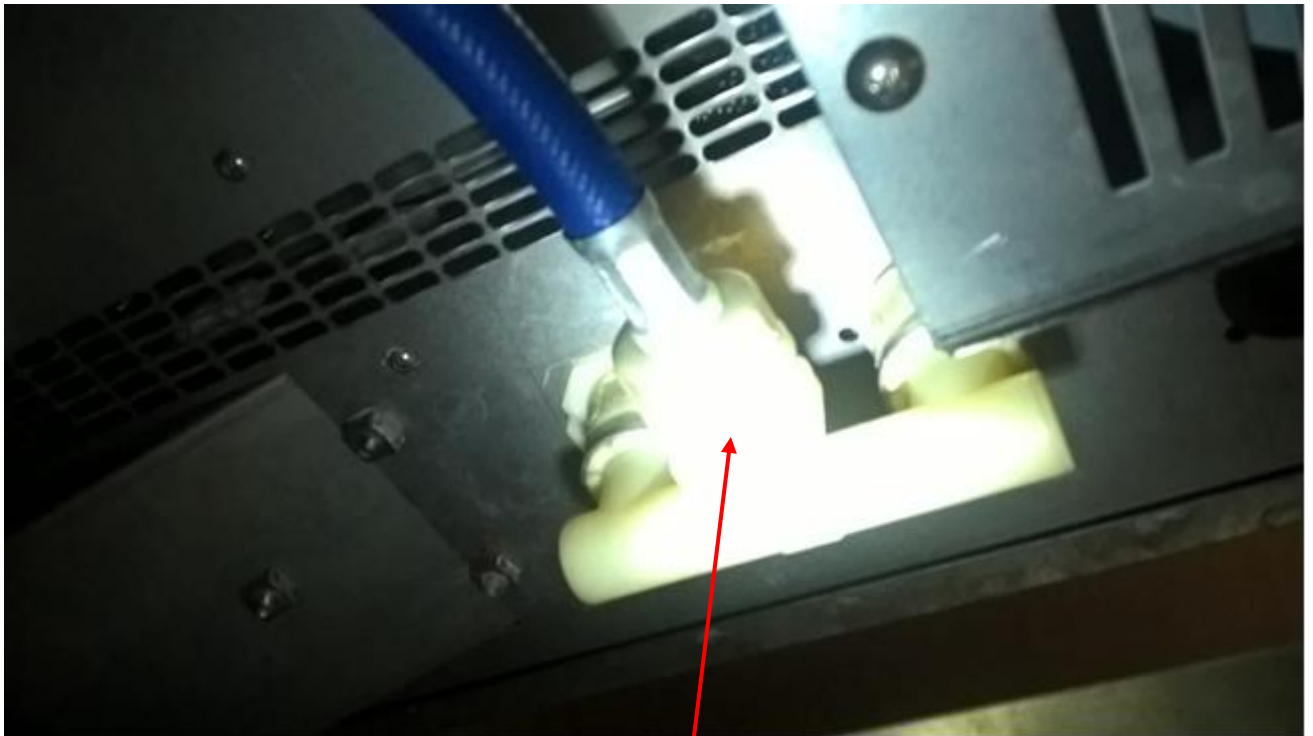

Remove the white plastic water inlet fitting before connecting the BRITA filter and separate mains water hoses